

# Storage water heater 15 litres S15-U



## Application areas

Single or multiple point supply:




- > Kitchen sink
- > Washbasin
- > Commercial wash rooms



# Storage water heater 15 litres S15-U



## Product information

Energy efficiency class <b>A</b> (Scale: A+ to F)		  <b>S15-U (undersink model)</b>
Part number:	4100-42153	
Content [litres]:	15	
Type; maximum operating pressure [MPa (bar)]:	unvented <sup>1)</sup> ; 0.8 (8)	
Water connections (thread connections):	G 3/8"	
Temperature range [°C]:	5 °C (5 °C) / 30 °C – 35 °C (ECO) / 55 °C / 80 °C (MAX)	
approx. mixed water amount 40 °C <sup>2)</sup> [litres]:	24	
Nominal power rating (kW):	2.2	
Voltage supply [V]:	1~ / N / PE 230 V AC	
Nominal current [A]:	10	
Heating time $\Delta t = 55 K$ <sup>3)</sup> [min]:	26	
Standby power consumption at 65 °C [kWh / 24h]:	0.43	
Internal tank:	copper	
Function indicator:	✓	
Protection class:	IP 24	
Dimensions (height × width × depth) [cm]:	45.2 × 30.0 × 28.5	
Power cable:	 with plug	
approx. weight filled with water [kg]:	22.5	

1) Optional installation with open-outlet tap 2) At a cold water temperature of 15 °C and a storage content temperature of 55 °C 3) Temperature increase e.g. from 15 °C to 70 °C

### Description

- > Unvented 15-litre storage water heater (undersink model) for hot water supply at one or two points-of-use
- > Corrosion-proof and therefore maintenance-free internal copper tank
- > High-quality insulation keeps heat losses at a minimum
- > Temperature control approx. 5 °C to 80 °C
- > For vented installation (with open-outlet tap) and unvented installation (with safety assembly)
- > Automatic frost protection
- > Power cable with plug (~110 cm)


# Storage water heater 15 litres S15-U Installation




Example of a **closed-outlet** installation with safety assembly **SGU** and single-lever mixer tap **EWT-C** for two basins.

Measurements in mm

Assembly and operating instructions must be observed upon installation.

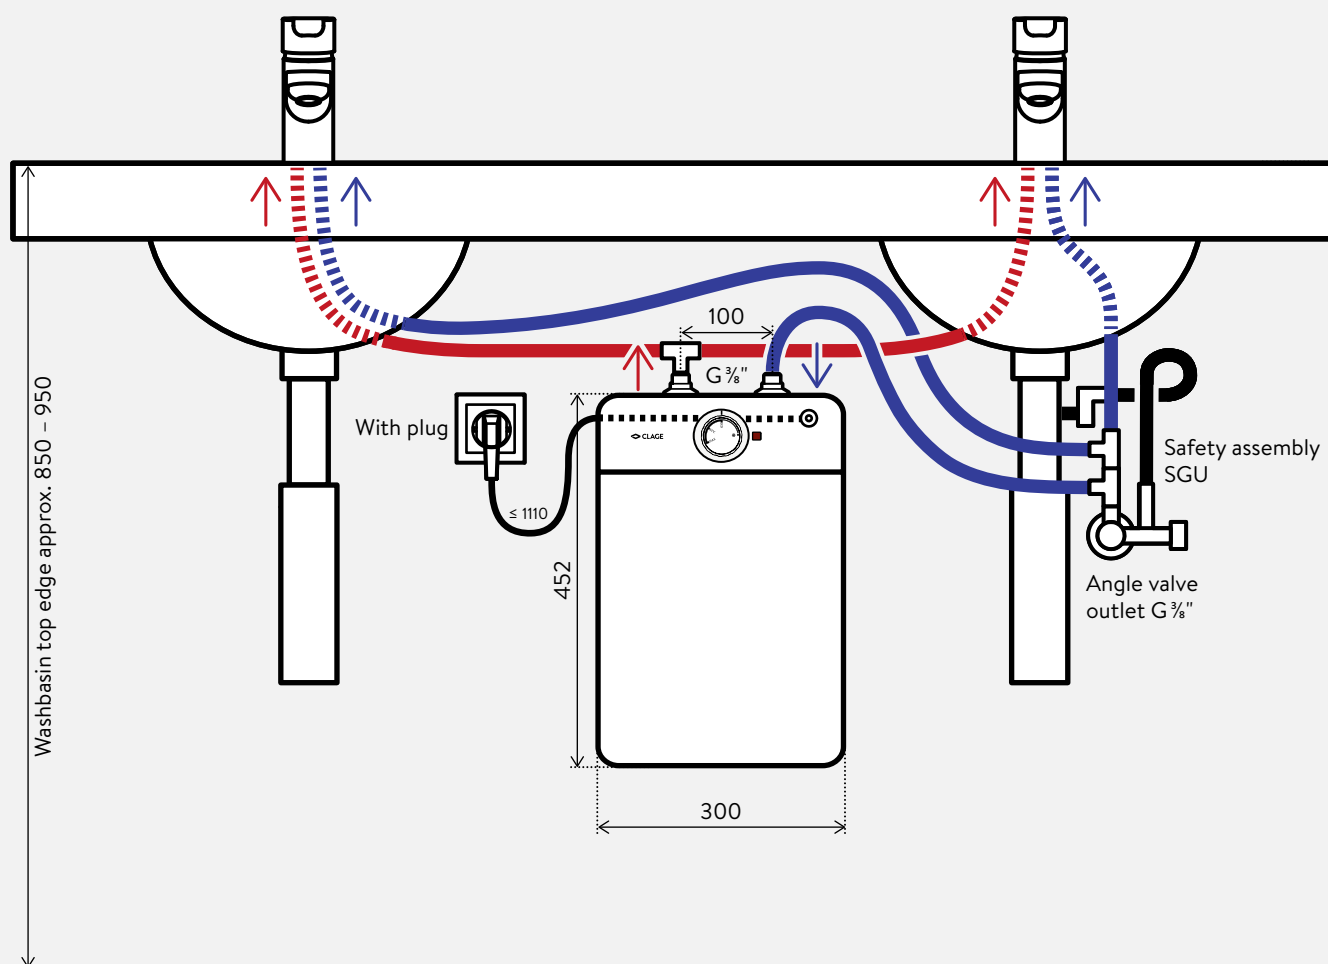

Side view:

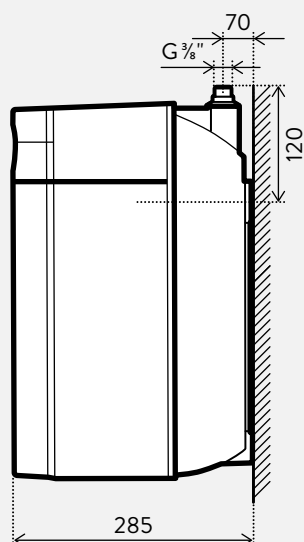


# Storage water heater 15 litres S15-U Installation




Example of an **open-outlet** installation with mixer tap **SNT** for one point-of-use.  
Assembly and operating instructions must be observed upon installation.

Measurements in mm

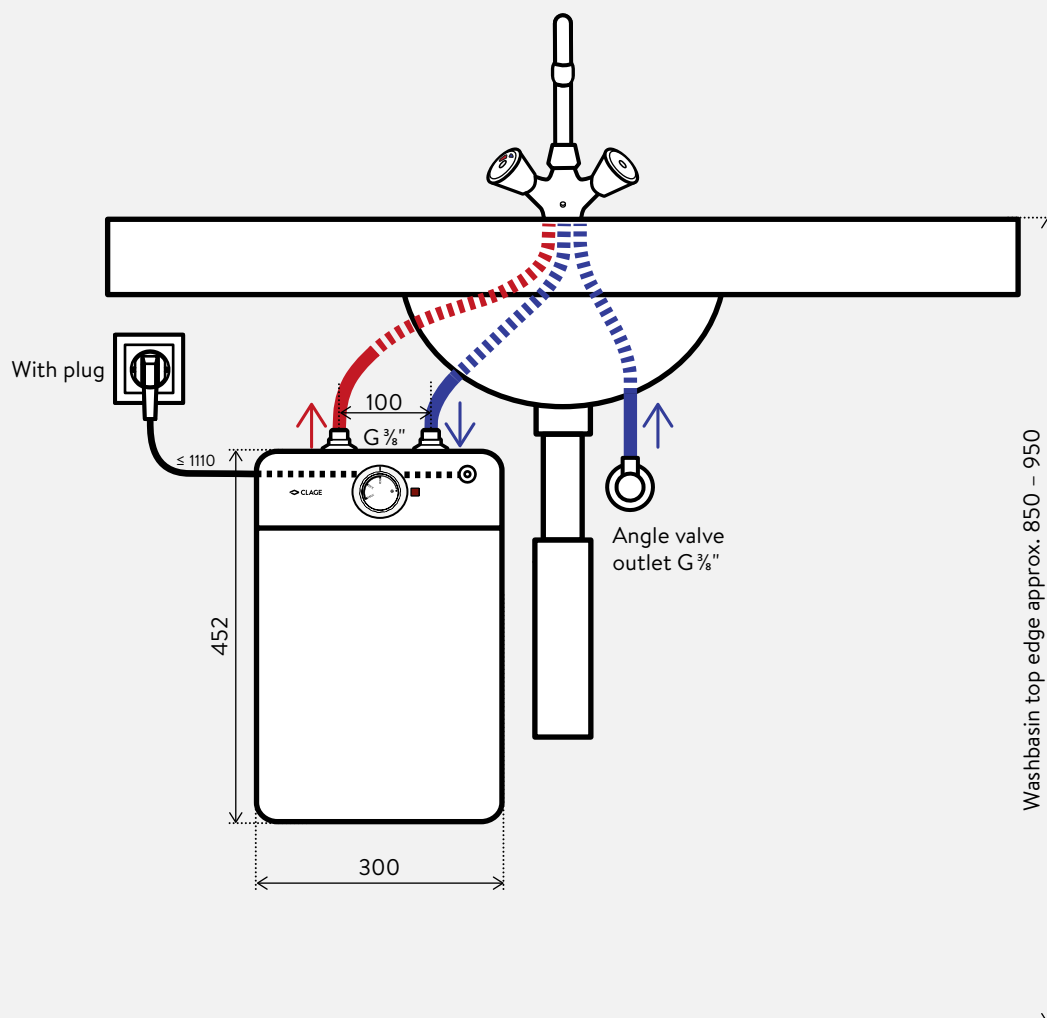

Side view:

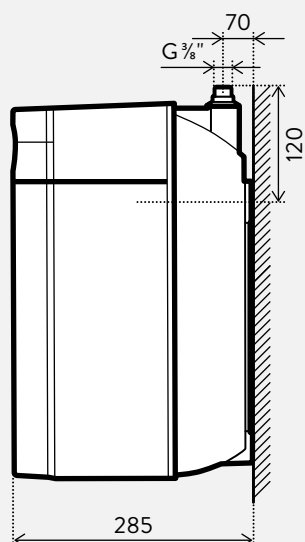

# Storage water heater 15 litres S15-U Accessories



## **SGU** (optional)

Undersink safety assembly with non-return valve, pressure reducer and flexible connecting hoses for closed-outlet installation

**SGU:** Part no. 4100-0013



## **SGUT** (optional)

T-piece kit for installation of an additional tap

**SGUT:** Part no. 4100-0014



## **SNT** (optional)

Two-handle temperature control mixer tap for open-outlet installation, temperature selection on the left, water volume adjustment on the right, with swivel spout 15.5 cm

**SNT:** Part no. 4100-0210



## **EWT-C** (optional)

Single-lever basin mixer tap for pressure resistant installation with nickel- and lead-free waterways, Easy-Fix-fastening system and pull rod pop-up waste, spout 11.2 cm, height x width: 15,1 x 17,5 cm

**EWT-C:** Part no. 1100-04421

Storage water heater 15 litres  
**S15-U**  
Accessories

---



**Aerators** (optional)

Aerator insert for tap adapter M22/24 at the tap

**CSS:** Part no. 0010-00504



Aerator with chrome tap adapter M22i  
(suitable for taps with male threads at the outlet)

**CSSi:** Part no. 89125